



Volvo FH 2013- (Globetotter / Globetotter XL)



Art. 868604770

Laternakandur | Lamp holder | Носител фар | Scheinwerferbügel



- | | |
|---|----|
| 1. Laternakandur / lamp holder / носител фар /
Scheinwerferbügel | 1 |
| 2. Kronstein / bracket / кронштейн / Konsole | 1 |
| 3. Kronstein / bracket / кронштейн / Konsole | 1 |
| 4. Kronstein / bracket / кронштейн / Konsole | 1 |
| 5. Kronstein / bracket / кронштейн / Konsole | 1 |
| 6. Polditav kronstein / bolt bracket / кронштейн /
Bolzenhalterung | 4 |
| 7. Laternaalus / lamp fixing bracket / крепежный
кронштейн лампы / Lampenbefestigungsklammer | 4 |
| 8. Kompensaator / compensator / компенсатор /
Kompensator | 4 |
| 9. Polt / bolt / болт / Bolzen M8x20 DIN933-A2 | 12 |
| 10. Polt / bolt / болт / Bolzen M8x25 | 4 |
| 11. Polt / bolt / болт / Bolzen M8x20 DIN7380-A2 | 8 |
| 12. Mutter / nut / гайка / Mutter M8 | 8 |
| 13. Seib / flat washer / шайба / Scheibe 8,4x16x1,6 | 24 |
| 14. Seib / flat washer / шайба / Scheibe 8,4x24x2 | 4 |
| 15. Vedruseib / spring washer / пружинная шайба /
Federnscheibe A8 | 16 |


M8 - 25 Nm





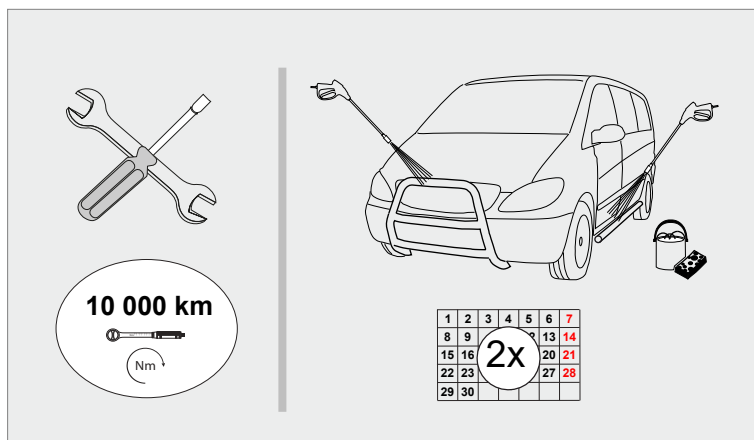






Kaal / Weight / Масса / Gewicht: 12 kg

Paigaldusaeg ilma elektritöödeta / Time of mounting w/o wiring works / Время установки без электромонт. работ /
Einbauzeit ohne elektrische arbeit: 45 min

Vajalikud tööriistad / Required Tools / Необходимые инструменты / Benötigte Werkzeuge



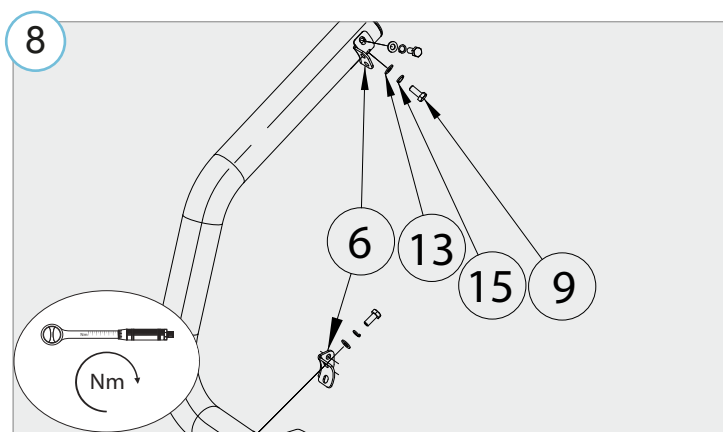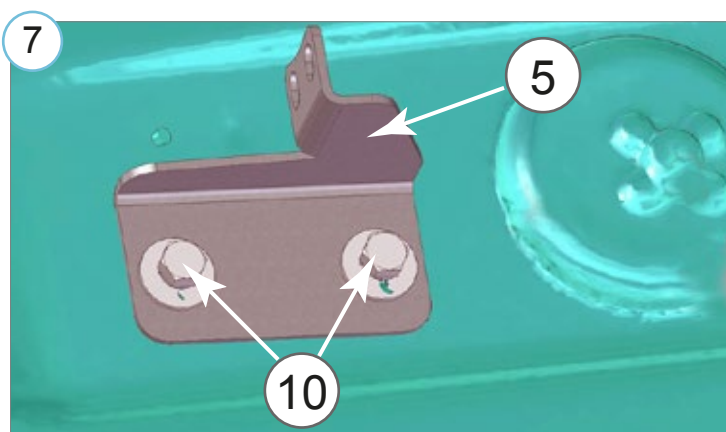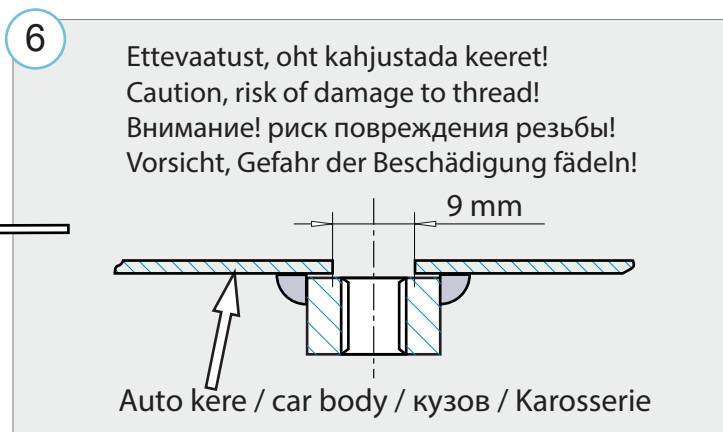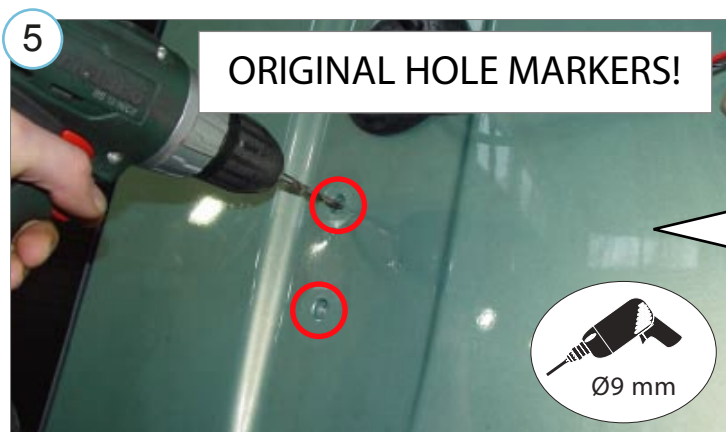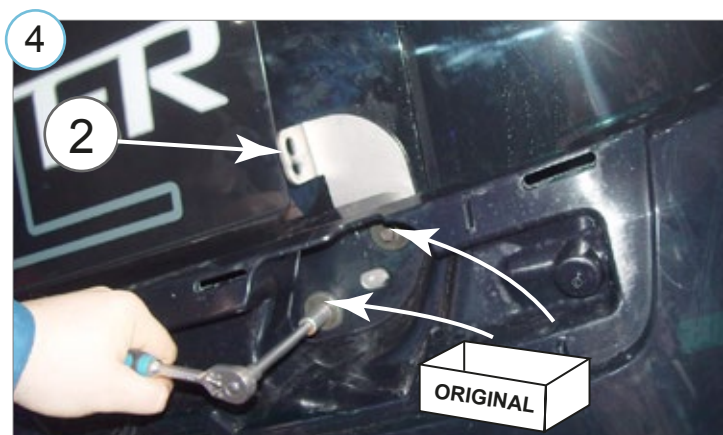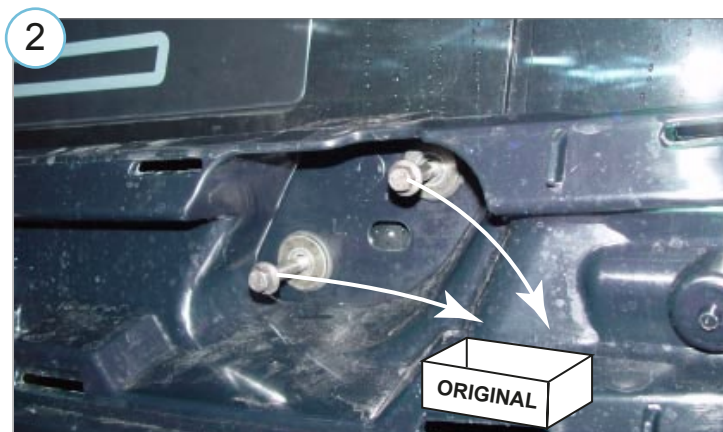

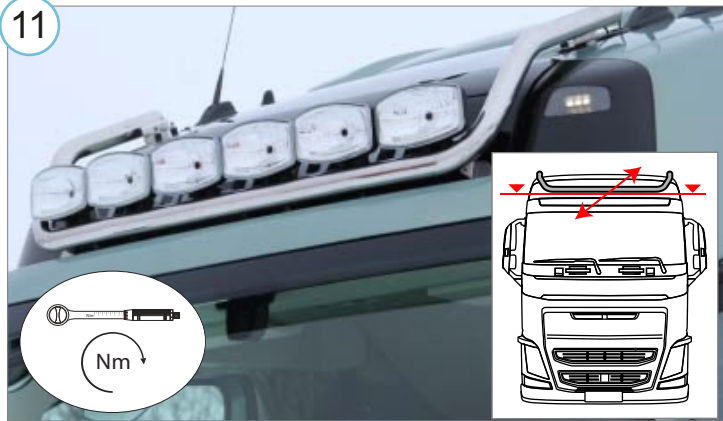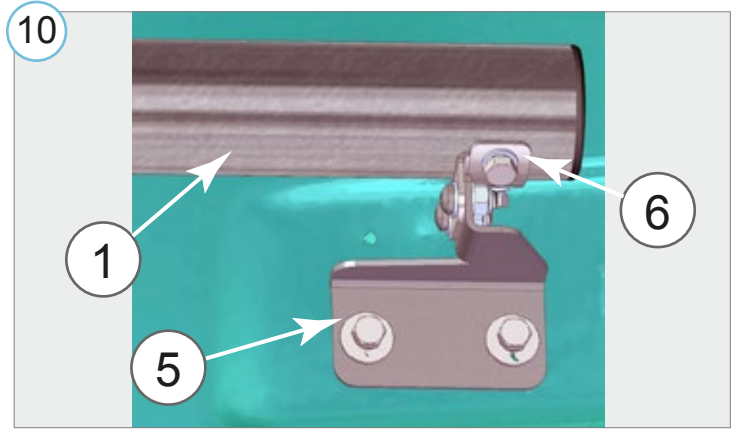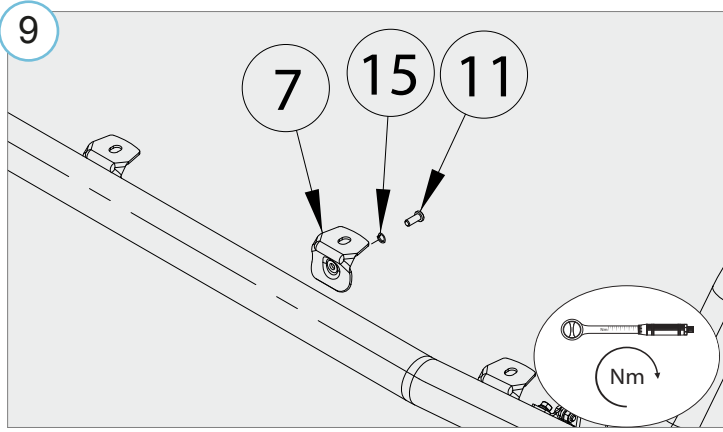

12 Elektrihëndused teostada kvalifitseeritud autoelektriku poolt

Installation of the lights can be carried out by qualified electrician only

Монтаж огней может быть выполнено только квалифицированным электриком

Die Installation der Lichter können durchgeführt werden durch Elektrofachkraft

Switching pattern of the lights of the holder with OE connectors for XC117 and XC172 of factory prewiring "SPOT-R" / "SPOT-RF" and "BEACON-P"

Tube mounted Led marker lights "C" (if presented) are connected inside the tube and connected with potential position lights of the extra spot lights.

Juhtmesari võimaldab ühendada:


- B harudele kokku tarbimist kuni 15A
- A harudele kokku tarbimist kuni 15A

B haru võimaldab kas eraldi lülitust või kogu-koormuse jaotamist kaablisoonde vahel (vajalik juhtmete ümbertõstmise auto pistikus)

Wiring allows to connect:


- B looms with gross load of 15A
- A looms with gross load of 15A

B loom connected either as separate "switch-on" or used to distribute the load between the wires (repositioning wires in the truck can connector)

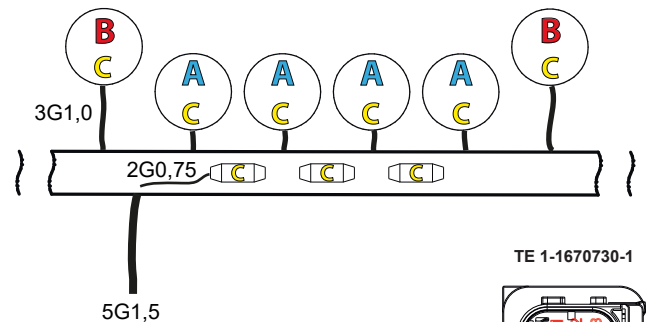

switch ON position	cord ID number references					
	5G1,5	3G1,0 A	3G1,0 B	2G0,75	to XC117 1670730-1	to XC172 60114164
yellow +	1	1	1	2	1	
ground -	Gr/y	Gr/y		1	3	
red +	2		2			1
blue +	3	2			2	
ground B -	4		Gr/y			2

TE 1-1670730-1



Volvo 60114164



Lisa / extra / приложение / Extra

