

# EUROGLOBE



1806-77140

### Mechanical Characteristics

	SI Units	US Units
<b>Length</b>	513 mm	20.2 inches
<b>Width</b>	189 mm	7.4 inches
<b>Height</b>	220 mm	8.7 inches
<b>Approx. weight</b>	42.0 kg	92.6 lbs

### Product design features:

- Sealed, AGM-technology
- Balanced cyclic life and float life performance
- Wide range of operating temperature
- One-way valve regulated system with flame-arrestor
- Internal gas recombination efficiency 98% - 99%
- Easy for installation, maintenance free product
- Delivered ready for use at 100% of its nominal capacity
- Non-hazardous cargo for ground, sea and air transport
- Fully recyclable product

### Electrical Characteristics

<b>Nominal voltage</b>	12 Volts
<b>Nominal Capacity (10H)</b>	140 Ah
<b>Reserve Capacity</b>	267 min
<b>CCA Performance (-18 deg.C)</b>	950 A [EN]
<b>Electrolyte density</b>	1.280 ± 0.015 g/ml

### Battery Layout




### Base Holddown



### Other Specifications

<b>Terminals</b>	Standard cone
<b>Case color</b>	Black
<b>Lid color</b>	Black
<b>Handles</b>	Yes (2)
<b>QTY/PLT/Layer</b>	24 / 1 / 3

### 25A and 20 hour discharge characteristics

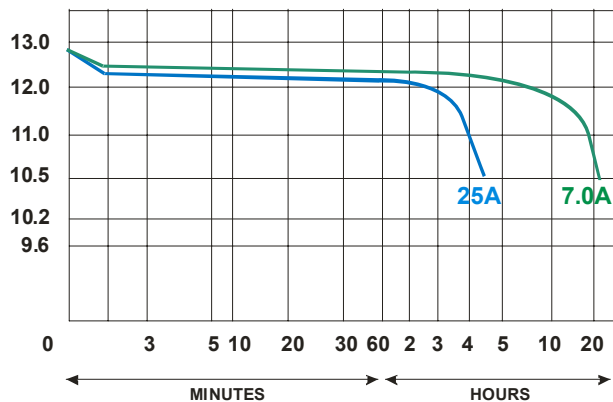

Loading Voltage vs Discharge Time

**Certificates: ISO 9001:2008, ISO 14001:2004,  
OHSAS 18001:2007, NATO AQAP 2110**