




Volvo FH 13- Globetrotter/Globetrotter XL

Art. 868612, 868613, 868614

Laternakandur TOP 6 Ø70 | lamp holder TOP 6 Ø70 | носитель фар TOP 6 Ø70 | Lampenbügel dach TOP 6 Ø70




- | | |
|--|----|
| 1. Laternakandur / lamp holder / носитель фар / Lampenbügel | 1 |
| 2. Vinkel / langed plate / угольник / Winkel | 2 |
| 3. Kronstein / bracket / кронштейн / Konsole | 1 |
| 4. Kronstein / bracket / кронштейн / Konsole | 1 |
| 5. T-polt / T-bolt / T-болт / T-bolzen | 2 |
| 6. U-polt / U-bolt / U-болт / U-bolzen | 2 |
| 7. Kompensaator / compensator / компенсатор / Kompensator | 2 |
| 8. Kompensaator / compensator / компенсатор / Kompensator | 4 |
| 9. Laternaklammer / clamp for lamp / зажим для лампы / Schelle | 6 |
| 10. Pold / bolt / болт / Bolzen M8x25 | 6 |
| 11. Mutter / nut / гайка / Mutter M6 | 4 |
| 12. Mutter / nut / гайка / Mutter M8 | 2 |
| 13. Seib / washer / шайба / Scheibe 6,4x18x1,6 | 12 |
| 14. Seib / washer / шайба / Scheibe 8,4x24x2 | 8 |
| 15. Vedruseib / spring washer / пружинная шайба / Federnscheibe A8 | 8 |

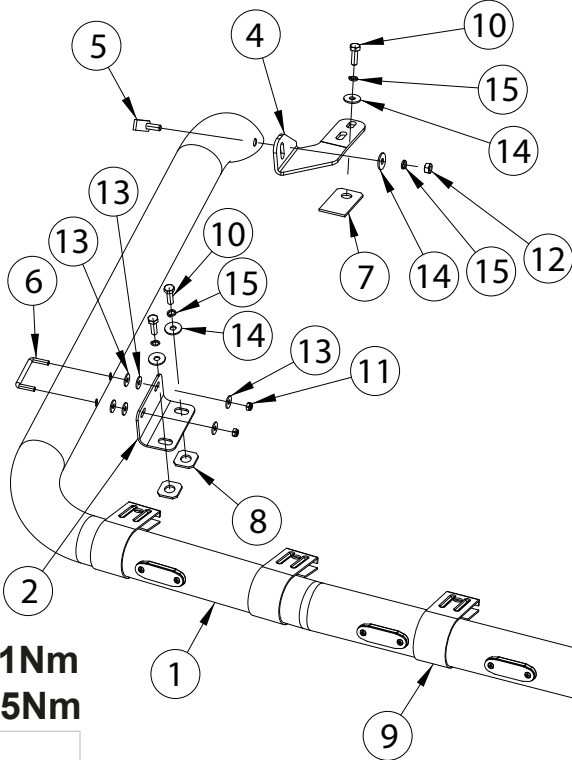

FWD

M6 - 11Nm
M8 - 25Nm













Kaal / Weight / Масса / Gewicht: 868612 - 12,3kg; 868613 - 12,5kg 868614 - 12,5 kg




Paigaldusaeg / Time of mounting / Время установки / Einbauzeit: 60min

Vajalikud tööriistad / Required Tools / Необходимые инструменты / Benötigte Werkzeuge



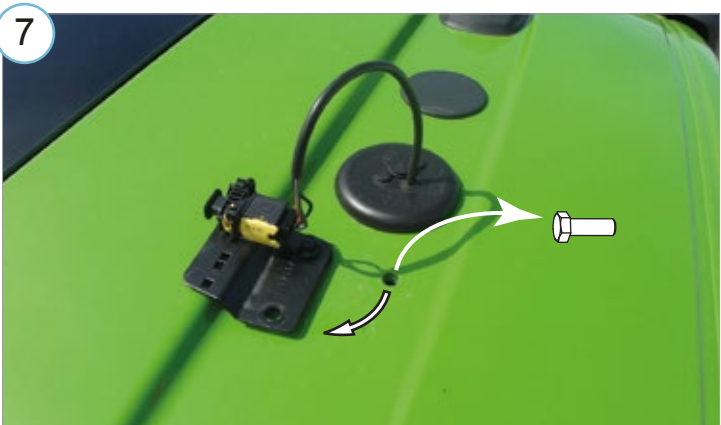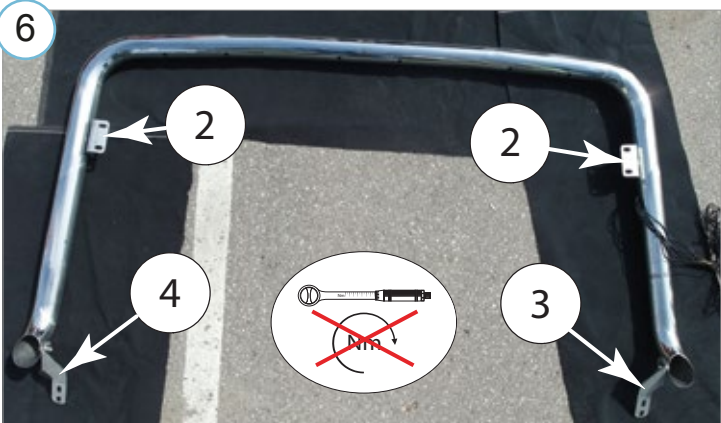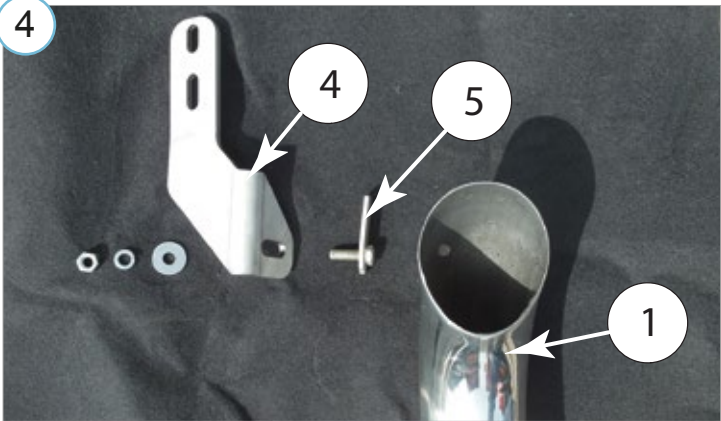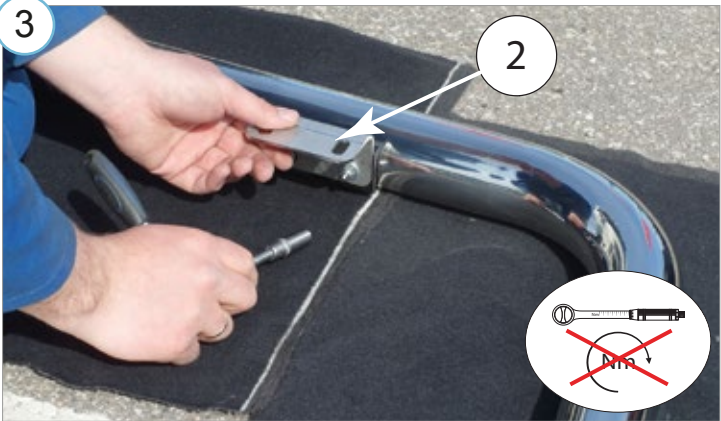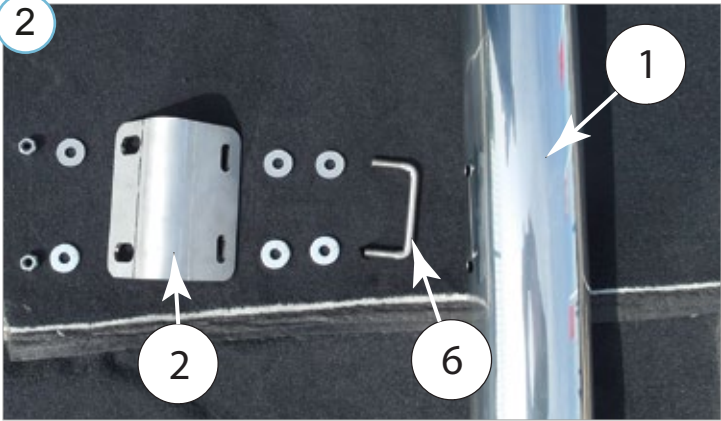

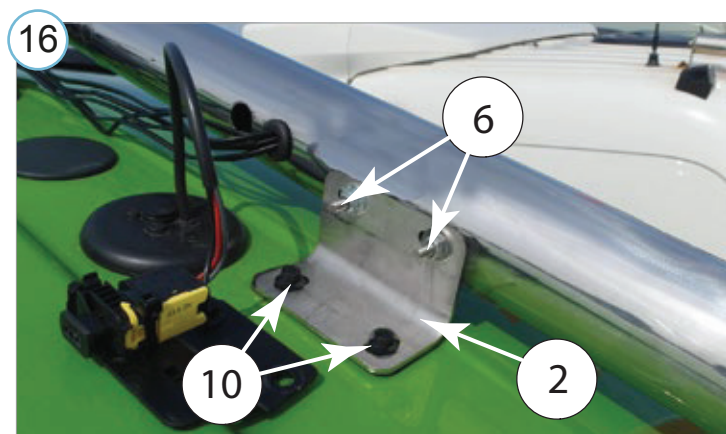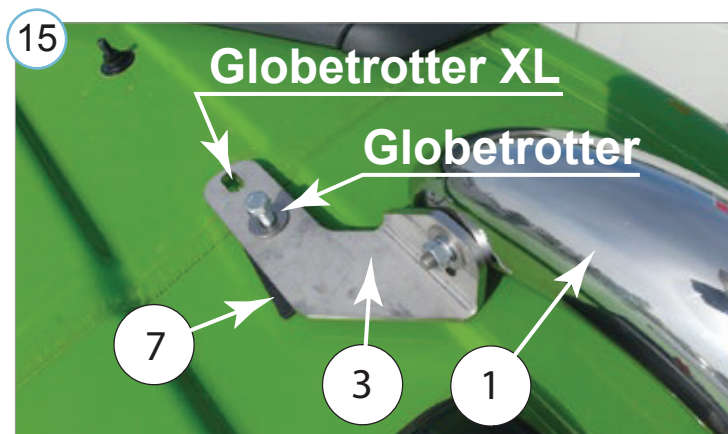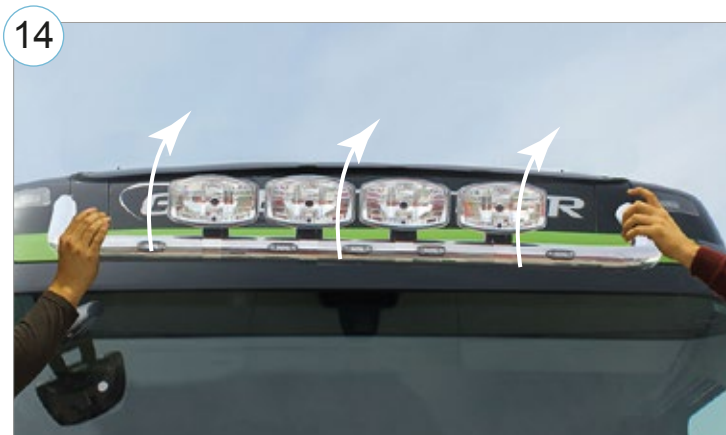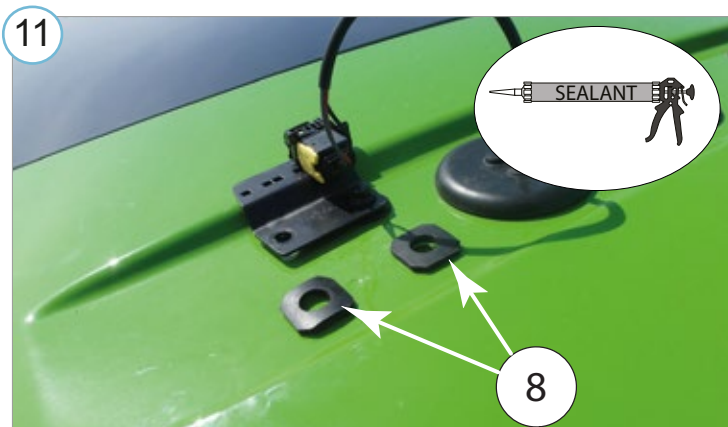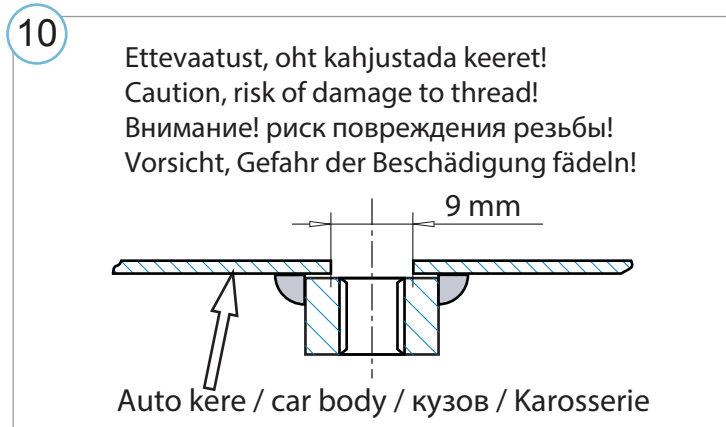

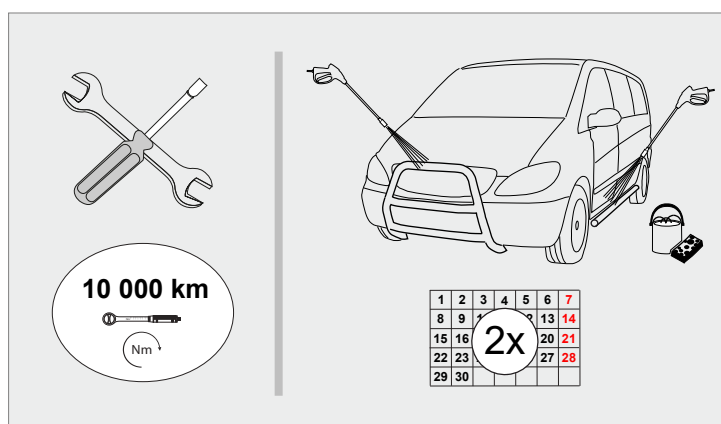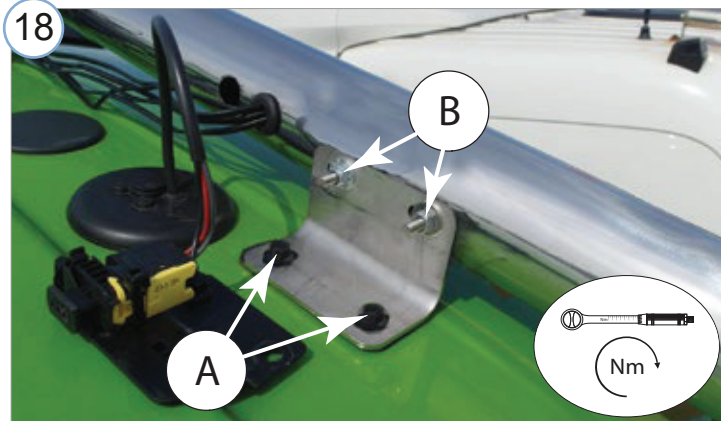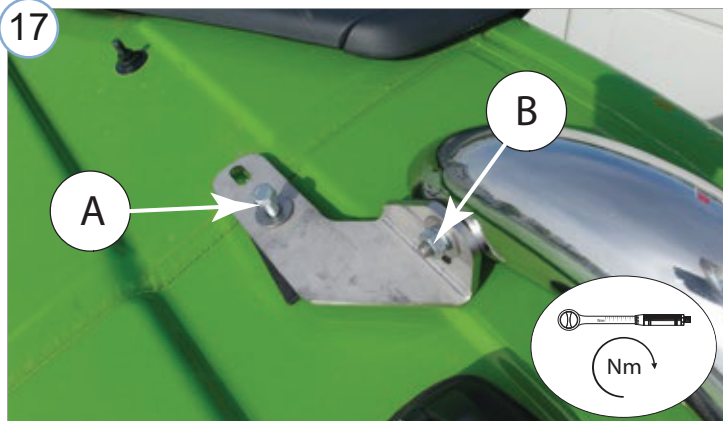

Elektriühendused teostada kvalifitseeritud autoelektriku poolt

Installation of the lights can be carried out by qualified electrician only

Die Installation der Lichter können durchgeführt werden durch Elektrofachkraft

Switching pattern of the lights of the holder with OE connectors for XC117 and XC172 of factory prewiring "SPOT-R" / "SPOT-RF" and "BEACON-P"

Tube mounted Led marker lights "C" (if presented) are connected inside the tube and connected with potential position lights of the extra spot lights.

Juhtmesari võimaldab ühendada:


- B harudele kokku tarbimist kuni 15A
- A harudele kokku tarbimist kuni 15A

B haru võimaldab kas eraldi lülitust või kogu-koormuse jaotamist kaablijoonte vahel (vajalik juhtmete ümbertõstmine auto pistikus)


Wiring allows to connect:

- B looms with gross load of 15A
- A looms with gross load of 15A


B loom connected either as separate "switch-on" or used to distribute the load between the wires (repositioning wires in the truck can connector)

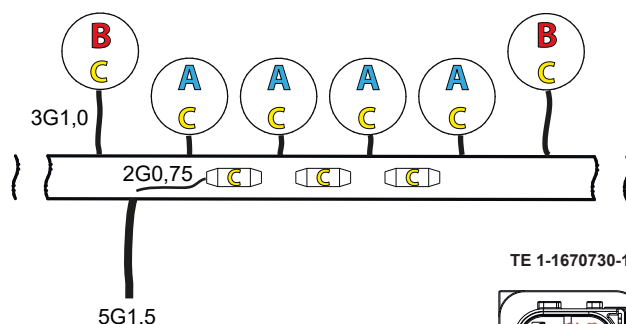

TE 1-1670730-1



Volvo 60114164



switch ON position	cord ID number references					
	5G1,5	3G1,0 A	3G1,0 B	2G0,75	to XC117 1670730-1	to XC172 60114164
yellow +	1	1	1	2	1	
ground -	Gr/y	Gr/y		1	3	
red +	2		2			1
blue +	3	2			2	
ground B -	4		Gr/y			2